




YTK ETS240R 4:3 16 feet width

Rear Tension Electric Screen (HD/short focus)

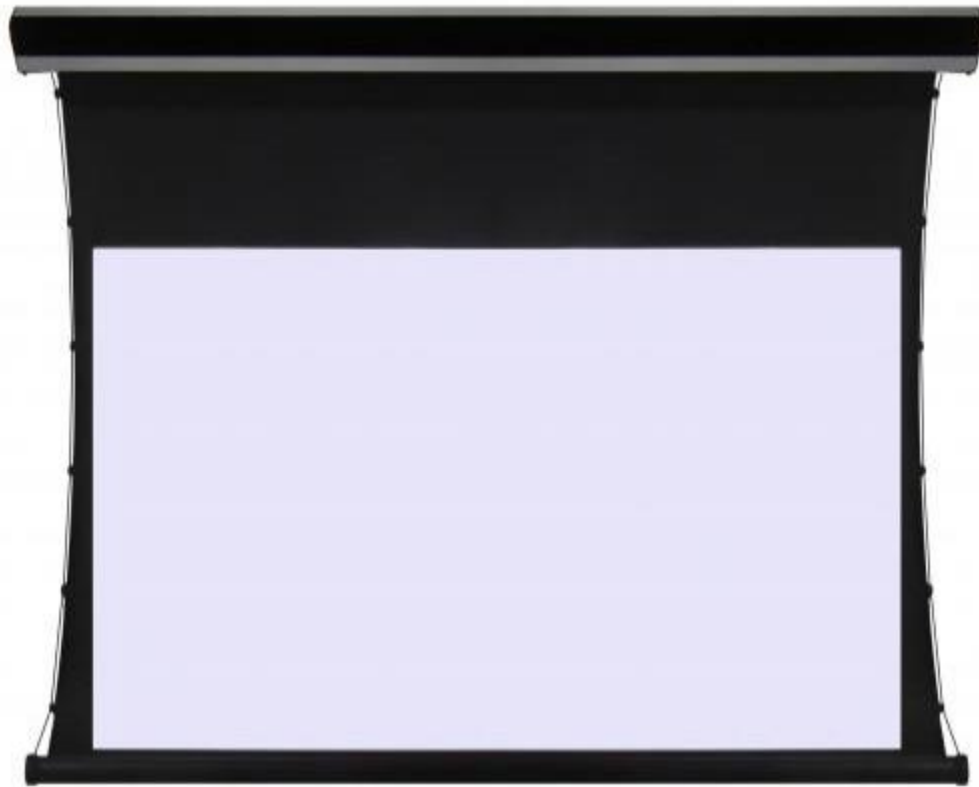

Features

- Roller Motor , 28 rotational speed of 1 minute(Motor: Three wired, quick reversal type, with thermal overload cutout, Integral gears, capacitor and electric brake to avoid coasting.)
- Preset and adjustable limit switch to stop screen in up/down positions
- Rigid metal roller with bearing.
- Coordination Projector makes Electric Screen automation
- Support RF wireless remote control, Up, Down, stop control switch for remote control

- Color: black/White
- Category: Matte Soft (Rear)



- Material: iron
- Flame retardant: yes
- Mildew resistant: yes
- Black masking borders: yes
- The best viewing angle: 120°
- Higher gain better reflection effect: Gain: 1.5
- Upper the shaft material: Aluminum alloy
- Below the shaft material: iron
- 1. Synchronous motor device can make screen work smoothly.
- 2. Streamline design, Beautiful with artistic appearance.
- 3. Manual or remote control is optional. Free to stop the screen at any location.
- 4. The screen surface is smooth and hard to distortion. It is also flame retardant, mildew and in duration resistant.
- 5. Screen surface can be cleaned (mild dishwashing liquid diluted with warm water)

Specification

- Nominal Diagonal: 240" 4:3
- Viewing size(W) x (H): inch:192" x 144" / mm: 4877 mm x 3658mm / feet: 16' x 12'
- Does not Needs the Horizontal seam
- Covering Material: iron
- Thickness of casing: 10"
- N.W.(kg): 190
- G.W.(kg): 232
- Power Supply: 220 V / 50 ~ 60 Hz
- Covering Dimension(L x W x H)mm: 5056 x 250 x 250

Accessories(Wireless control series):

RF-A1

(Wireless/ relay control)



RF-A2 for EDR-series

**(Built-in install/
Wireless/ relay control)**



RF-A3

(Wireless/manual control)





RF-A232


(Wireless/RS232/Manual/relay control)




Diagram:



Front

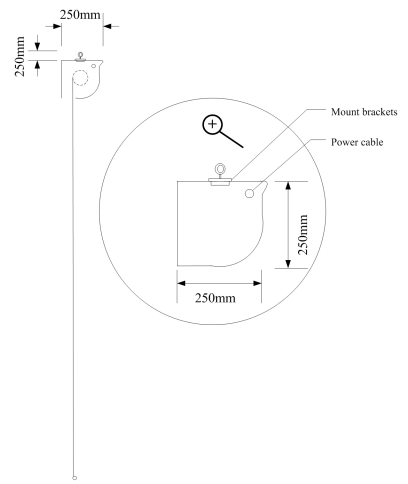

Side



Vertical view

Suitable use:

Hall, Lecture Theaters, Cinema

Warranty: 12 Month

CB CE

www.ytk.com.hk